

100%
Recycled
Nylon

Elevation III

Interface®



4199001 COLLETINO

4199002 BROCATELLO

4199003 PALISSANDRA

4199004 CIOCCOLATO




4199005 FIOR DI PESCO

4199006 CEPPO DI GRE

4199007 GRIGIO NILO

4199008 PORTORO

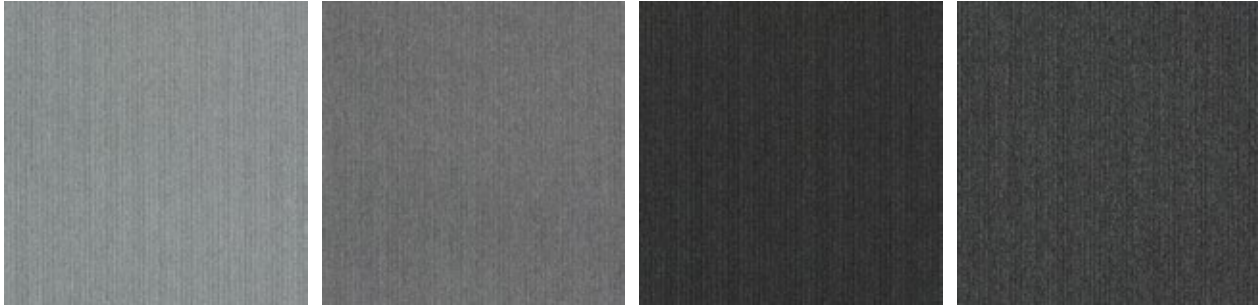

4199009 CARRARA

4199010 JURA

4199011 VALDEORRAS

4199012 NERO MAQUINA



4199013 BOTTICINO

4199014 ROMANO CLASSICO

4199015 CREMA LUNA

4199016 OPALE NATURALE




4199017 CIPOLLINO

4199018 AQUA MARINA

4199019 AZURO CIELO

4199020 ZIRCONA

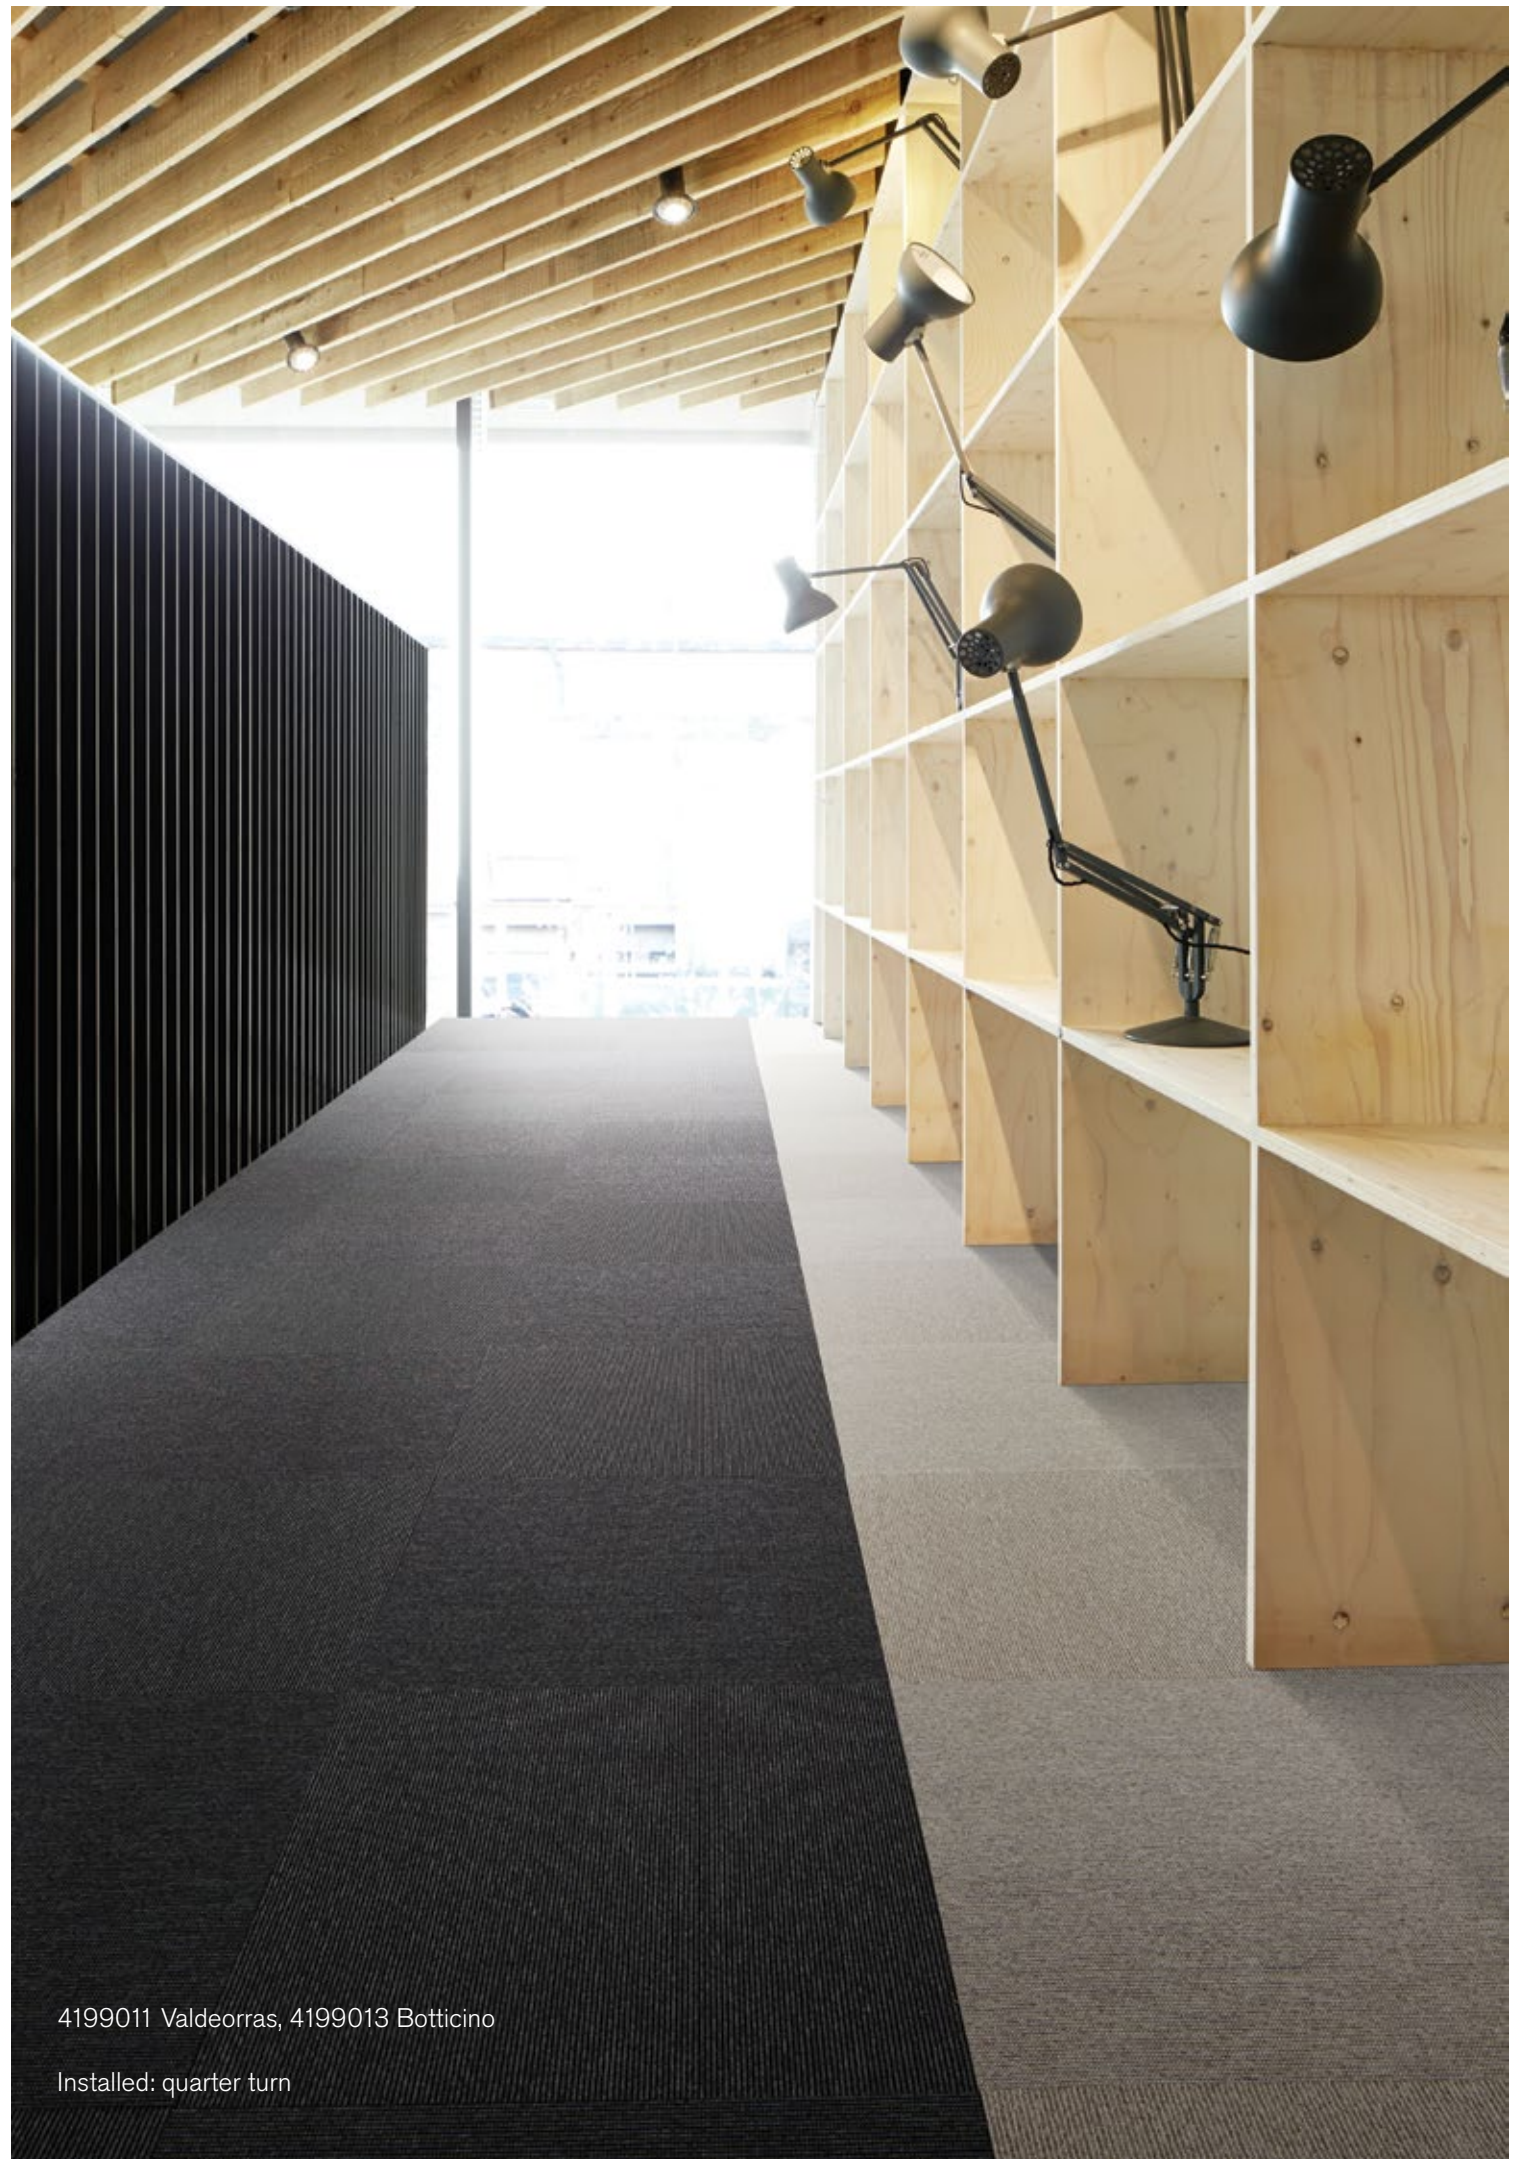



4199015 Crema Luna
Installed: quarter turn



4199018 Aqua Marina
Installed: quarter turn

Environmental Data Sheet

Construction			
Yarn system	100% Recycled Solution Dyed Nylon		
Backing system	Graphlex®		
Recycled Content	Total	Pre Consumer	Post Consumer
Yarn average	100,0%	50,0%	50,0%
Product average	53,5%	49,17	4,33%
Recycled content can be subject to differences between colours. See details for individual colours on next page.			
Carbon Footprint	Global Warming Potential (kgs CO2 equivalents/sq meter)		
Full life-cycle carbon footprint (following our EPD results or EPD calculation method)	Raw materials and Production:		5.01 kg CO ₂ eq./m ²
	Delivery and installation:		0.6 kg CO ₂ eq./m ²
	Use (10 years):		2.92 kg CO ₂ eq./m ²
	End of life (waste to energy):		7.82 kg CO ₂ eq./m ²
	TOTAL (10 years' lifetime):		16.35 kg CO ₂ eq./m ²
CO ₂ compensation	Carbon neutral Cool Carpet® is standard		
Manufacturing			
Location	Scherpenzeel, NL		
	Factory is certified ISO 14001 since 1996 and ISO 9001 since 1990		
Installation Impacts			
TacTiles™	Optimised for glue-free installation with TacTiles™ connectors with virtually zero VOCs		
Installation Waste	In a typical installation* using the installation method below:		
	Quarter turn – 3-4% installation waste		
	For reference: 2 metre wide broadloom typically generates 7-10 % installation waste		
	* In a rectangular building, installed before walls.		
End-of-life			
Alternatives to landfill	Reuse: Can be cleaned and reused in a non-critical location to extend its useful life		
	Recycling: Can be returned through the Interface ReEntry scheme and be re-used as raw material in new carpet tiles		
	Waste-to-Energy: Can be incinerated in appropriate waste to energy plant		
Indoor Air Quality			
GUT (Gemeinschaft umweltfreundlicher Teppichboden)	The product passes all requirements of GUT's testing criteria regarding hazardous substances, emissions and odour.		
	GUT PRODIS certificate B2E536BF		
CRI (Carpet & Rug Institute)	Compliant to LEED IQ 4.3 credit (tested in Eurofins to the equivalent test of the CRI Green Label Plus)		
Compliance to Green Building Schemes			
See next page to check how our products contribute to the main green building certification schemes (BREEAM, LEED, HQE and DGNB)			
Type III Environmental Product Declaration			
EPD according to ISO 14025	This product has a type III Environmental Product Declaration, EPD-IFF-20120020-CBD1-EN		

Recycled content – colour level						
Colourway	Total Recycled Content	Pre consumer recycled content	Post consumer recycled content	Total yarn recycled content	Yarn pre-consumer	Yarn post-consumer
4199001 COLLETINO	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199002 BROCATELLO	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199003 PALISSANDRA	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199004 CIOCCOLATO	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199005 FIOR DI PESCO	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199006 CEPPO DI GRE	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199007 GRIGIO NILO	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199008 PORTORO	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199009 CARRARA	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199010 JURA	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199011 VALDEORRAS	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199012 NERO MAQUINA	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199013 BOTTICINO	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199014 ROMANO CLASSICO	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199015 CREMA LUNA	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199016 OPALE NATURALE	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199017 CIPOLLINO	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199018 AQUA MARINA	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199019 AZURO CIELO	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%
4199020 ZIRCONA	53.50%	49.17%	4.33%	100.00%	50.00%	50.00%

Compliance to Green Building Schemes	
BREEAM (UK + inter)	BRE Green Guide Ratings: Office - Applied for Education - Applied for Health Care - Applied for Retail (by fashion) - Applied for Potential contribution to following categories and credits: Hea 02 - Indoor air quality – minimising sources of air pollution Hea 05 - Acoustic Performance Mat 01 - Life Cycle Impacts Mat 05 - Designing for robustness

Wst 01 - Construction Waste Management



TacTiles™

- A smarter, more sustainable way to install carpet tiles
- No need for liquid adhesives
- Fitting tiles is quick, clean and easy and the process virtually eliminates emissions
- No damage to sub floors, and nothing to stop you lifting or moving the carpet whenever you want



Entrance Matting

Incredibly tough, hard-wearing and practical; indoor entrance matting acts as the first line of defence to any interior by removing almost 100% of dirt, rain and mud before it's walked into your flooring.

Both of the products in our commercial entrance matting range – Barricade and Foyer – are resilient, functional, easy to maintain and stylish. And it's for these reasons that our barrier matting forms an essential part of any maintenance programme needed to keep your floorcovering looking its very best.